

ECL-LED2 LED RANGE



TECHNICAL SPECIFICATIONS


MODEL NO:	ECL-LED 2
Mode of Operation:	Maintained / Non-Maintained
Lamp Type:	3 - 70V LED Load
Rated Duration:	2 Hours
Mains Supply:	220-240 Volts, 50-60Hz
Supply Current:	40mA
Power Consumption:	< 4.0W
Trickle Charge:	125mA / 225mA
Battery Charger:	Regulated variable rate
Battery Protection:	Low battery voltage cut off to prevent over discharge
Battery Type:	High Temperature Nickel Cadmium
Charge Monitor:	LED
Test Facility:	Momentary test switch
Casing Construction:	Electro-galvanised steel
Max. Casing Temp, Tc:	70°C
Max. Ambient Temp, Ta:	50°C
Standards / Compliance:	IEC 61347-2-7 (SS 490-2-7), SS 563, IEC 61347-2-13, IEC 62384

Ordering Guide:

Ordering Code	Battery Type	Battery Configuration
ECL-LED2/240/4.8/2.5-A	NiCd 4.8V 2.5AH	Cane
ECL-LED2/240/4.8/2.5-S	NiCd 4.8V 2.5AH	Side by side
ECL-LED2/240/4.8/4.5-A	NiCd 4.8V 4.5AH	Cane
ECL-LED2/240/4.8/4.5-A+A	NiCd 4.8V 4.5AH	Side by side

OUR SLIMMEST LED CONVERSION KIT THAT IS COMPACT AND EFFICIENT.

- LED Load.
- Extra low standby power consumption.
- Low-profile casing (22mm x 28mm cross-section)
- Suitable for a wide range LED load voltage range
- Regulated charger output
- Able to power a LED light fitting at a reduce luminous flux for two hours or more
- Automatically activated in the event of power cuts
- Offer a good luminous flux to facilitate the evacuation.

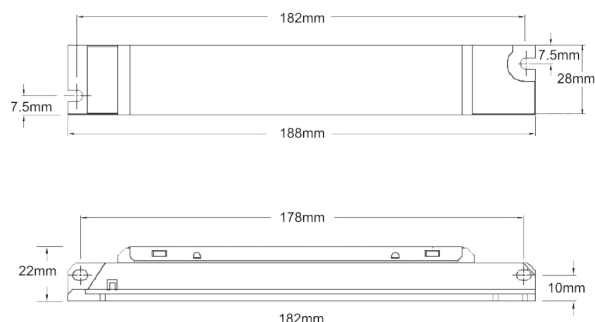

CLASS I



PSB Singapore

Type and batch tested with
PSB PLS-LISTED LABEL