

# EXB-LED-M-WP WEATHERPROOF LED

WELL-EQUIPPED EXIT LIGHT THAT  
DEFIES HARSH ENVIRONMENTAL  
CONDITIONS.




## TECHNICAL SPECIFICATIONS





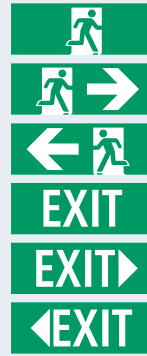

<b>MODEL NO:</b>	EXB-LED-M-WP
<b>Mode of Operation:</b>	Maintained
<b>Lamp:</b>	1.2W White LED module with burning life-span > 50,000 hours
<b>Rated Duration:</b>	3 Hours
<b>Mains Supply:</b>	220-240 Volts, 50-60Hz
<b>Power Consumption:</b>	3W (Total standby power inclusive of LED converter)
<b>Battery:</b>	High Temperature Nickel Cadmium
<b>Charger:</b>	Regulated variable rate
<b>Charge Monitor:</b>	LED
<b>Test Facility:</b>	Micro switch
<b>Mounting:</b>	Surface wall / Semi-recessed wall
<b>Safety Features:</b>	Low battery voltage cut off to prevent over discharge
<b>Diffuser:</b>	Injection moulded with fire retardant (UL94), high impact material
<b>Fitting Construction:</b>	Injection moulded with fire retardant (UL94), high impact material
<b>Weight:</b>	Approx. 1.2 Kg
<b>Dimensions:</b>	171mm (H) x 406mm (W) x 65mm (D)
<b>Standards /</b>	SS IEC 60598-2-22, SS 563

## Ordering Guide:


### Legend




### Single Sided

	EXB-LED-M-WP-S-RM
	EXB-LED-M-WP-SR-RM
	EXB-LED-M-WP-SL-RM
	EXB-LED-M-WP-S
	EXB-LED-M-WP-SR
	EXB-LED-M-WP-SL

- Ultra bright white LEDs meeting ISO safety colour requirements.
- Exceeds SS IEC 60598-2-22 and SS 563 brightness requirements
- Extra low power consumption
- High Quality , Long Life SMD LED module
- Series connection of LEDs achieve a high level of uniform light distribution and ensuring maximum life span.
- Low battery voltage cut-off with latch function, to eliminate battery over discharge.

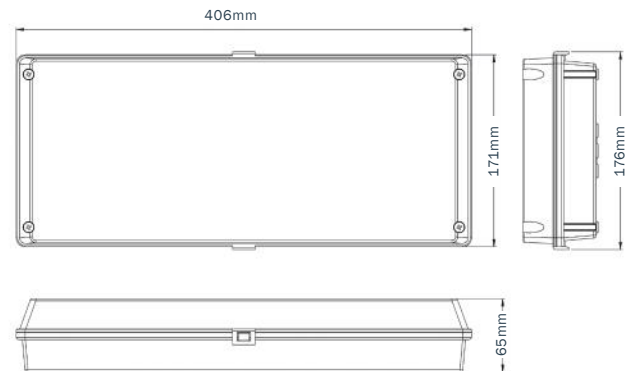

CLASS II



IP65