


# ELD1NM SELF-CONTAINED / SUSTAINED LED

(with MINIMOD, MOD, SLIDE ON MODULE)

DESIGNED TO DISCREETLY INCREASE  
RELIABILITY AND AVOID AGEING EFFECTS

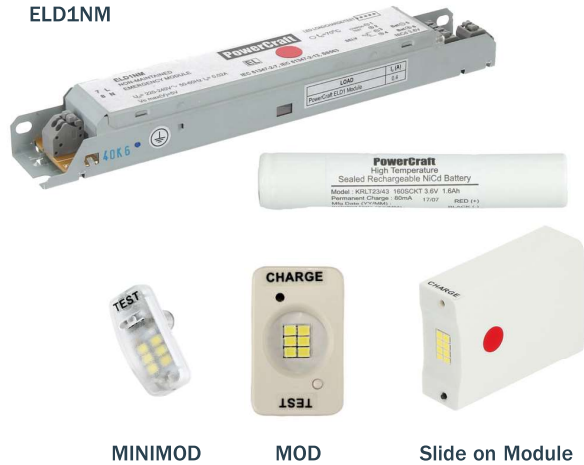

- Prevents damage to fluorescent or LED lamps as it is independent from voltage and output from the general lighting
- Optimal and uniform light point spacing for anti-panic luminaires and escape route luminaires can be achieved.
- Reliability of the emergency modules is increased as the LED modules are addressed separately from the general lighting therefore ageing effects are avoided.
- Easy wiring and full compatibility.





TECHNICAL SPECIFICATIONS	
MODEL NO:	ELD1NM
Mode of Operation:	Non-Maintained
Lamp Module:	MINIMOD: 3W, MOD: 3W, Slide on Module: 4W
Rated Duration:	3 Hours
Mains Supply:	220-240 Volts, 50-60Hz
Power Consumption:	< 1.5W
Battery:	High Temperature Nickel Cadmium
Charge Monitor:	LED
Test Facility:	Micro switch
Safety Features:	Low battery voltage cut off to prevent over discharge
Fitting Construction:	Injection moulded with fire retardant, high impact material
Weight:	Approx. 0.3 Kg
Standards / Compliance:	SS IEC 60598-2-22

\*\*\*Note: Technical Specification subject to change without prior notice

Ordering Guide:

Ordering Code

- ELD1NM-S
- ELD1NM-MINIMOD
- ELD1NM-MOD

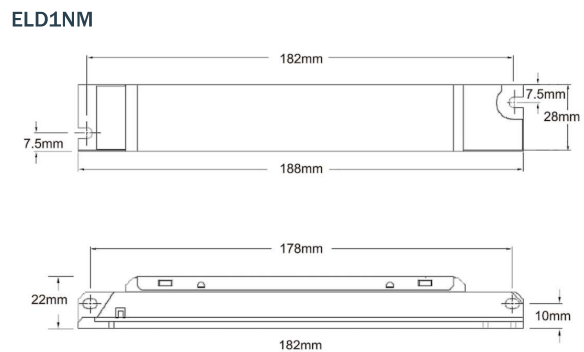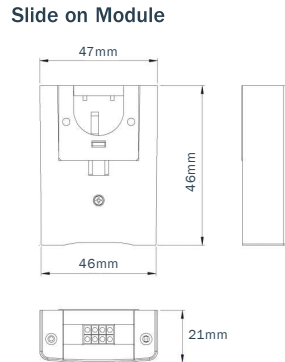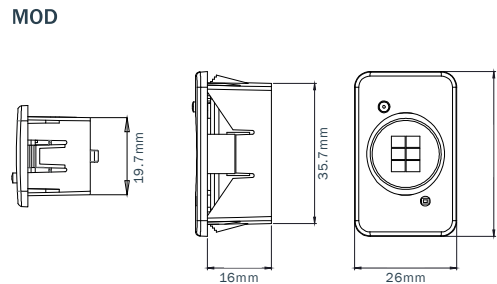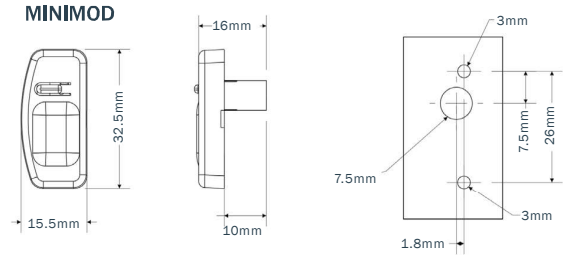

CLASS I



PSB Singapore



Type and batch tested with PSB PLS-LISTED LABEL