

# REL20NM-LED RECESS LED

**BRIGHTEST STAR THAT SHINES  
IN EVERY ARCHITECT'S DREAM.**



So discreet and unobtrusive that you will not even realize its presence BUT will provide you the greatest spacing.

## TECHNICAL SPECIFICATIONS

<b>MODEL NO:</b>	<b>REL20NM-LED</b>
Mode of Operation:	Non-Maintained
Lamp:	3W White LED
Rated Duration:	3 Hours
Mains Supply:	220-240 Volts, 50-60Hz
Power Consumption:	< 1.5W
Battery:	High Temperature Nickel Cadmium
Charger:	Regulated variable rate
Charge Monitor:	LED
Test Facility:	Micro switch
Safety Features:	Low battery voltage cut off to prevent over discharge
Fitting Construction:	Aluminium epoxy powder coated reflector, galvanised zinc coated charger housing
Weight:	Approx. 0.3 Kg
Standards / Compliance:	SS IEC 60598-2-22, SS 563

## Ordering Guide:


### Ordering Code

REL20NM-LED-60mm


REL20NM-LED-120mm

- Very wide spacing, double of traditional 10W halogen.
- Save up to 2/3 of the number of fittings used.
- Energy savings, extra low standby power consumption.
- Slim casing , fit through 50mm hole.
- Easy Installation and low maintenance

### 60mm Reflector

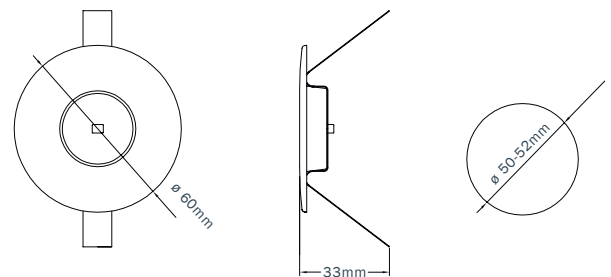

### 120mm Reflector

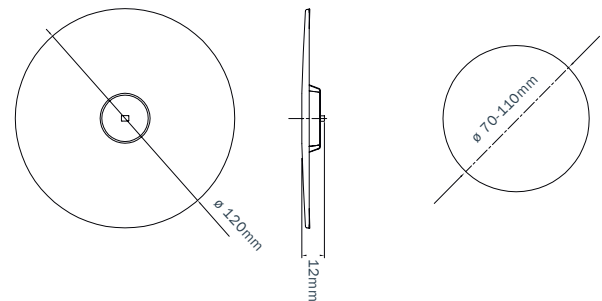


### REL20NM-LED



CLASS I



PSB Singapore



\*\*\*Note: Technical Specification subject to change without prior notice