


# REL20NM-LED SELF-CONTAINED / SUSTAINED LED

DESIGNED TO DISCREETLY BLEND  
IN WITH YOUR GENERAL LIGHTING.

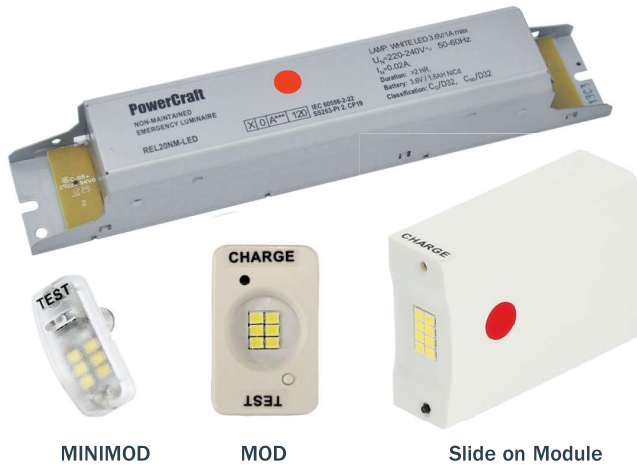

- Prevents damage to fluorescent or LED lamps as it is independent from voltage and output from the general lighting
- Optimal and uniform light point spacing for anti-panic luminaires and escape route luminaires can be achieved.
- Reliability of the emergency modules is increased as the LED modules are addressed separately from the general lighting therefore aging effects are avoided.
- Easy wiring and full compatibility.

## TECHNICAL SPECIFICATIONS

<b>MODEL NO:</b>	<b>REL20NM-LED</b>
Mode of Operation:	Non-Maintained
Lamp Module:	MINIMOD: 3W, MOD: 3W, Slide on Module: 4W
Rated Duration:	3 Hours
Mains Supply:	220-240 Volts, 50-60Hz
Power Consumption:	< 1.5W
Battery:	High Temperature Nickel Cadmium
Charger:	Regulated variable rate
Charge Monitor:	LED
Test Facility:	Micro switch
Safety Features:	Low battery voltage cut off to prevent over discharge
Fitting Construction:	Galvanised zinc coated charger housing
Weight:	Approx. 0.3 Kg
Standards / Compliance:	SS IEC 60598-2-22, SS 563

## Ordering Guide:


### Ordering Code

REL20NM-LED-MINIMOD


REL20NM-LED-MOD

REL20NM-LED-SL


### MINIMOD

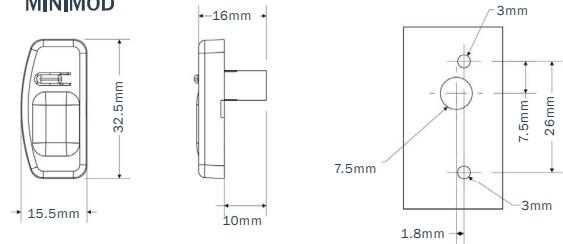

### MOD

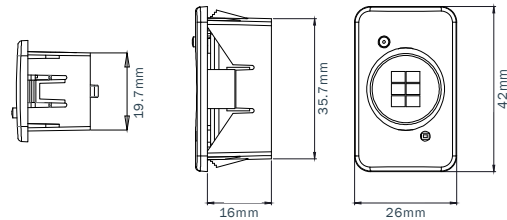

### Slide on Module



### REL20NM-LED



\*\*\*Note: Technical Specification subject to change without prior notice



CLASS I



Type and batch tested with PSB PLS-LISTED LABEL