


CMZ2LF-E-UPS

EXPLOSION PROOF

MAINTAINED / NON-MAINTAINED EXPLOSION
PROOF EMERGENCY LUMINAIRE

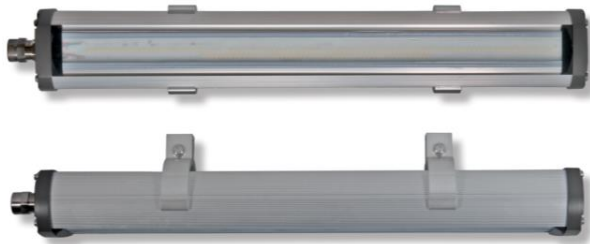

Ordering Guide:

Ordering Code


CMZ2LF-E-UPS

- Made of aluminum extrusion alloy material, meeting IP66 ingress protection.
- Surface mounted with multiple mounting accessories available for fast and versatile installation options.
- Suitable for maintained and Non maintained operation with central battery systems with wide AC or DC output.
- Explosion proof construction meeting the requirements of CENELEC EN60079-0: 2018, EN60079-1: 2014, EN60079-7: 2015, EN60079-18: 2015, EN60079-31: 2014 and EUROPEAN DIRECTIVE 2014/34/EU ; IEC60079-0: 2017, IEC60079-1: 2014, IEC60079-18: 2014, IEC60079-31: 2013, IEC60079-7: 2015

TECHNICAL SPECIFICATIONS

MODEL NO:	CMZ2LF-E-UPS
Mode of Operation:	Maintained or Non Maintained
Lamp:	30W White LED
Colour Temp :	5000K
Supply Mains	220-240V AC 50/60Hz
Emergency Supply (UPS) :	220-240V AC 50/60Hz, 150-300V DC
Current Consumption:	< 0.18
Fitting Construction:	Aluminum alloy extrusion
Fitting Dimensions :	1200 x 105 x 120mm
Protection :	IP66
Relevant Standards :	IEC 60598-2-22

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

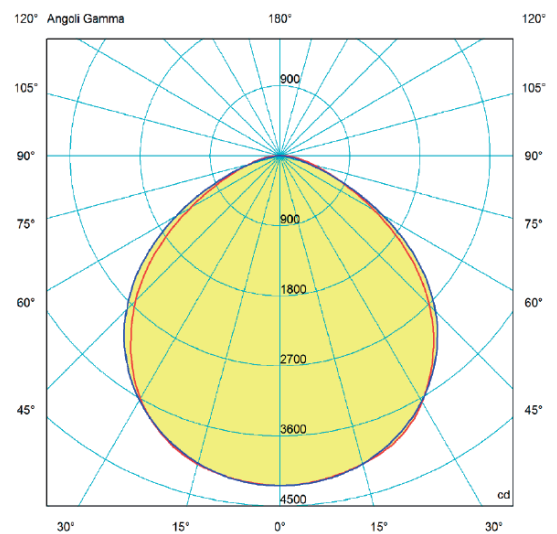

***Note: Technical Specification subject to change without prior notice

DIMENSIONS:

