

REL50 RECESS LED

NON-MAINTAINED COMPACT RECESSED MOUNT
CYLINDRICAL EMERGENCY LUMINAIRE




Ordering Guide:

Ordering Code

REL50NM-UPS-CU

- Integrated, cylindrical design for fast installation and easy maintenance.
- Recessed mount
- Very high output light suitable for high ceiling installations and/or where high light levels are desired during emergency.
- Suitable for back up lighting

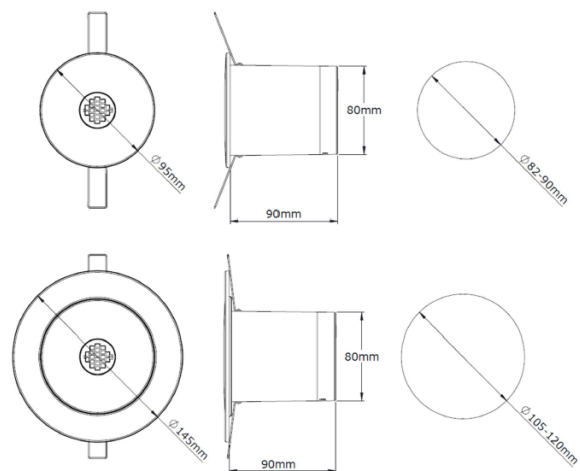

TECHNICAL SPECIFICATIONS

MODEL NO:	REL50NM-UPS-CU
Mode of Operation:	Non Maintained
Lamp:	12W White LED
Light Output :	500 lm
Supply Mains	220-240V AC 50/60Hz
Emergency Supply (UPS) :	220-240V AC 50/60Hz, 150-300V DC
Current Consumption:	< 0.03
Fitting Construction:	Injection moulded with fire retardant (UL94) high impact PC material
Fitting Dimensions :	R95x90mm
Weight :	Approx 0.5kg
Relevant Standards :	IEC 60598-2-22

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

