

# REL200

## ***SURFACE LED***

NON-MAINTAINED SURFACE MOUNT  
CYLINDRICAL EMERGENCY LUMINAIRE




### Ordering Guide:

Ordering Code

REL200NM-UPS-CY

- Quick fit, cylindrical design for fast installation and easy maintenance.
- Surface or suspended mounting
- Extremely high output light suitable for high ceiling installations and/or where high light levels are desired during emergency.
- Suitable for back up lighting

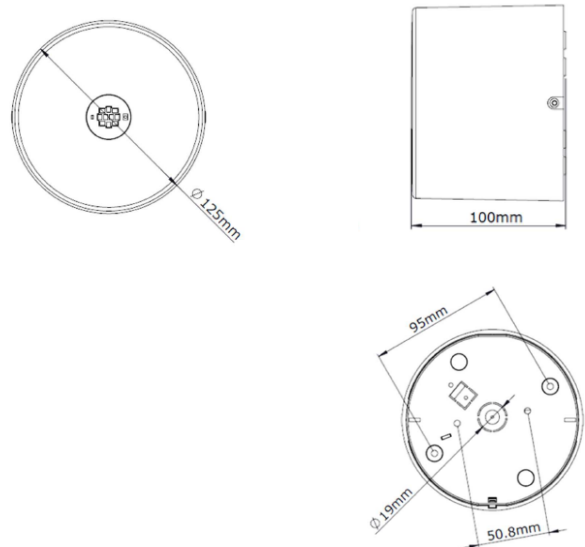

### TECHNICAL SPECIFICATIONS

MODEL NO:	REL200NM-UPS-CY
Mode of Operation:	Non Maintained
Lamp:	20W White LED
Light Output :	1700 lm
Emergency Supply (UPS) :	220-240V AC 50/60Hz, 150-300V DC
Power Consumption:	<18W
Power Factor :	> 0.9
Fitting Construction:	Injection moulded with fire retardant (UL94) high impact PC material
Fitting Dimensions :	R125x100mm
Weight :	Approx 0.5kg
Relevant Standards :	IEC 60598-2-22

### LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

