

# REL500

## ***SURFACE LED***

NON-MAINTAINED SURFACE MOUNT  
CYLINDRICAL EMERGENCY LUMINAIRE




### Ordering Guide:

Ordering Code

REL500NM-UPS-CY

- Cylindrical design for fast installation and easy maintenance.
- Surface or suspended mounting
- Extremely high output light with narrow beam COB LED, suitable for high ceiling installations and/or where high light levels are desired during emergency.
- Suitable for back up lighting, indoor or outdoor, wet areas, IP65

## Dimensions

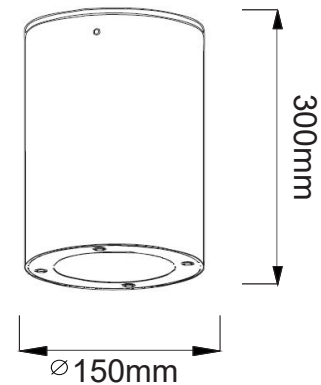

## TECHNICAL SPECIFICATIONS

MODEL NO:	REL500NM-UPS-CY
Mode of Operation:	Non Maintained
Lamp:	50W White LED
Light Output :	2500 lm
Emergency Supply (UPS) :	220-240V AC 50/60Hz
Power Consumption:	<30W
Power Factor :	> 0.9
Fitting Construction:	Extruded aluminium and die-cast aluminium housing, powder coat finish, Fire resistant silicone seal waterproof gasket, 8mm thick glass.
Fitting Dimensions :	R150x300mm
Weight :	Approx 3.0kg
Relevant Standards :	IEC 60598-2-22

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

